

CCNA 200-301, Volume I


Chapter 9

Spanning Tree Protocol Concepts

Objectives

- STP and RSTP Basics
- Details Specific to STP (and Not RSTP)
- Rapid STP Concepts


Broadcast Storm

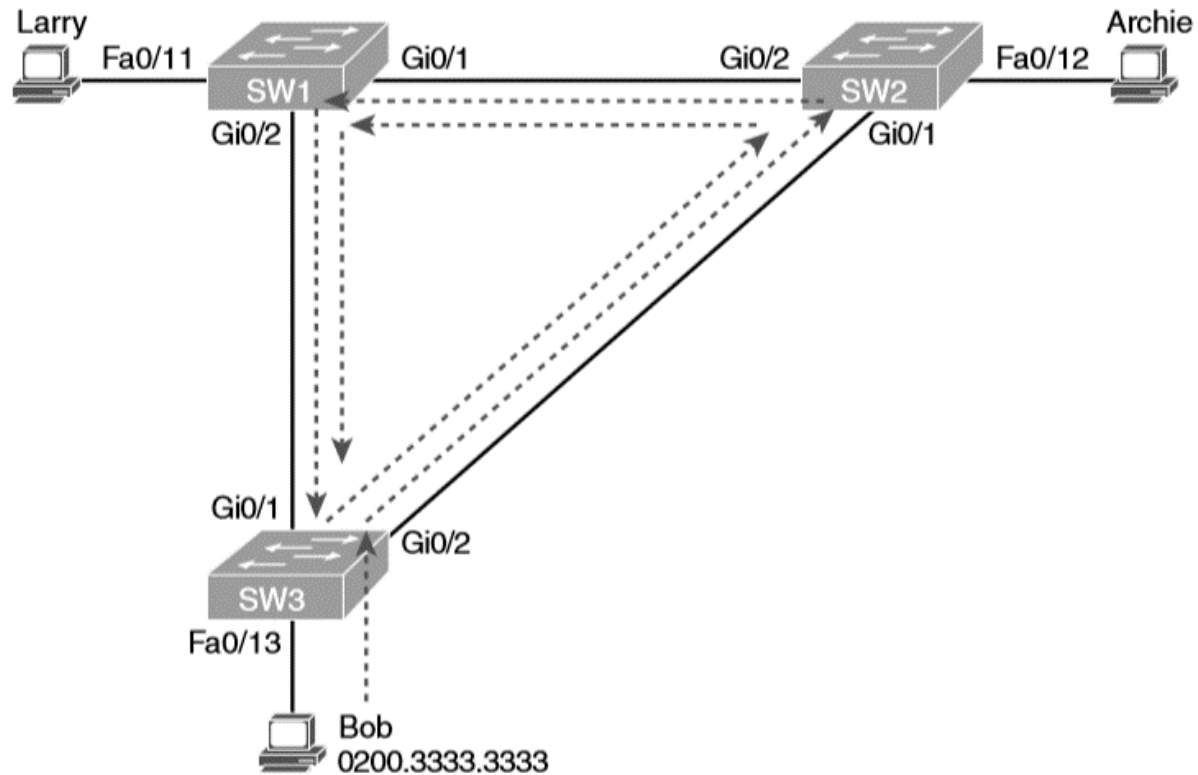

Three Classes of Problems Caused by Not Using STP in Redundant LANs

Problem	Description
Broadcast storms	The forwarding of a frame repeatedly on the same links, consuming significant parts of the links' capacities
MAC table instability	The continual updating of a switch's MAC address table with incorrect entries, in reaction to looping frames, resulting in frames being sent to the wrong locations
Multiple frame transmission	A side effect of looping frames in which multiple copies of one frame are delivered to the intended host, confusing the host

STP/RSTP Blocks a Port to Break the Loop

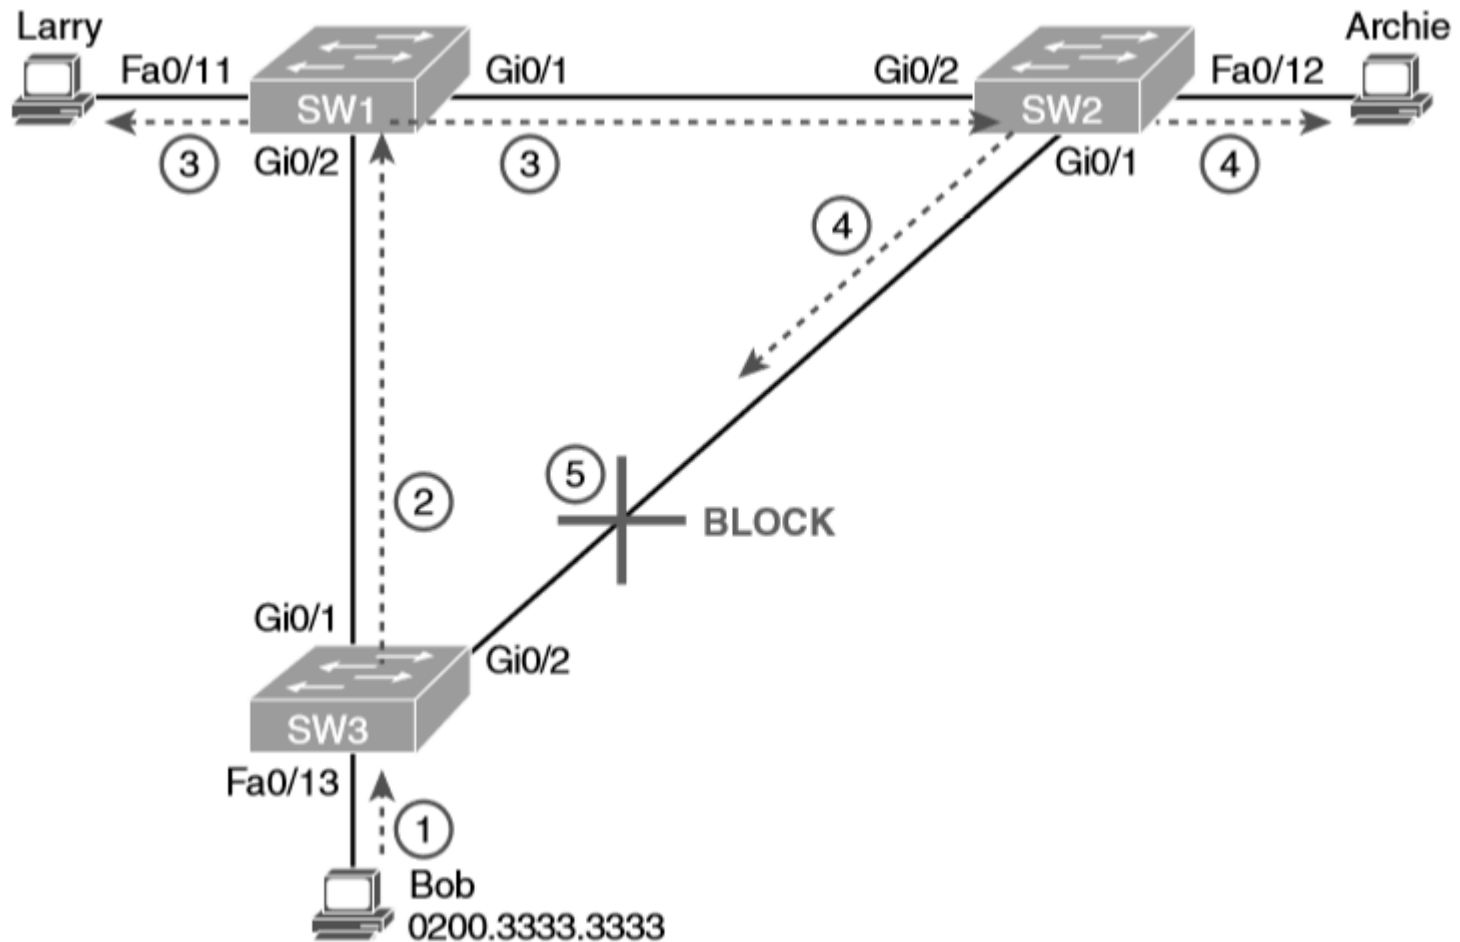


STP/RSTP: Reasons for Forwarding or Blocking

Characterization of Port	STP State	Description
All the root switch's ports	Forwarding	The root switch is always the designated switch on all connected segments.
Each nonroot switch's root port	Forwarding	The port through which the switch has the least cost to reach the root switch (lowest root cost).
Each LAN's designated port	Forwarding	The switch forwarding the Hello on to the segment, with the lowest root cost, is the designated switch for that segment.
All other working ports	Blocking	The port is not used for forwarding user frames, nor are any frames received on these interfaces considered for forwarding.


Fields in the STP Hello BPDU

Field	Description
Root bridge ID	The bridge ID of the switch the sender of this Hello currently believes to be the root switch
Sender's bridge ID	The bridge ID of the switch sending this Hello BPDU
Sender's root cost	The STP/RSTP cost between this switch and the current root
Timer values on the root switch	Includes the Hello timer, MaxAge timer, and forward delay timer


Beginnings of the Root Election Process

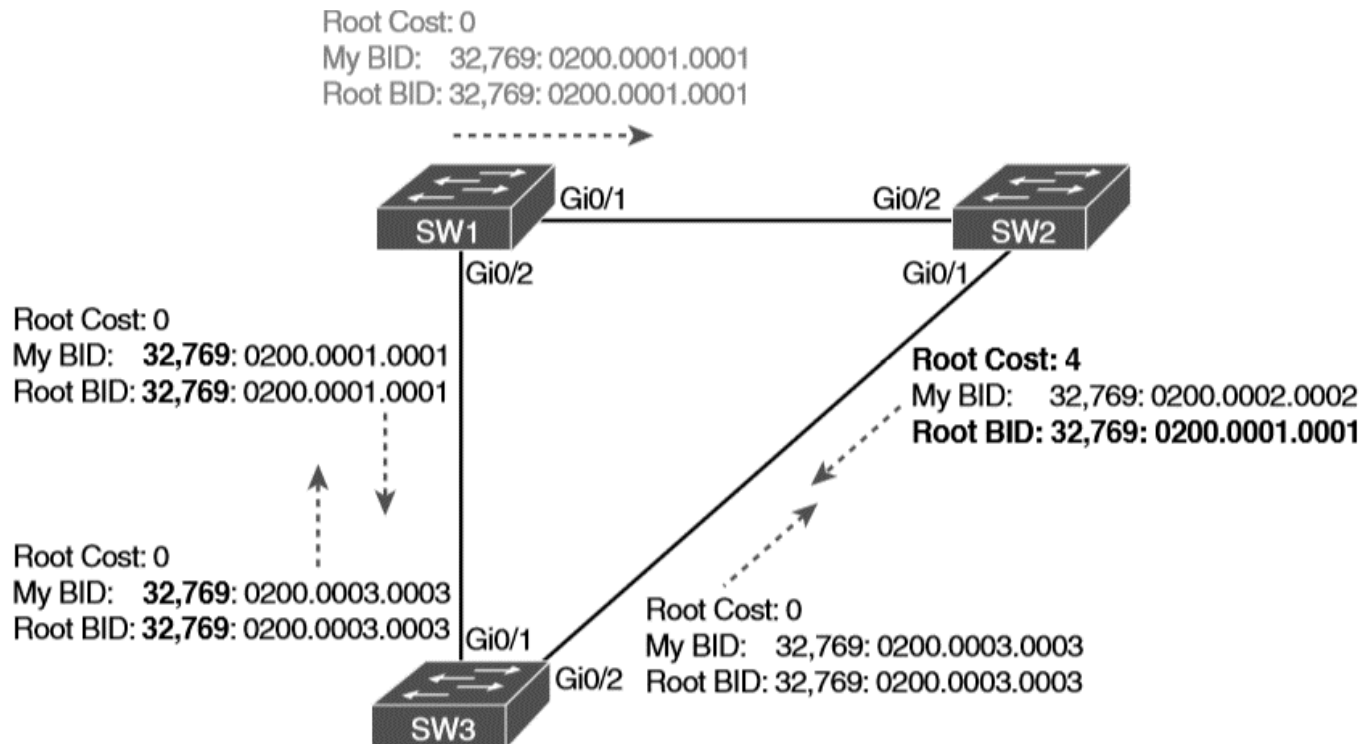

SW1 Wins the Election

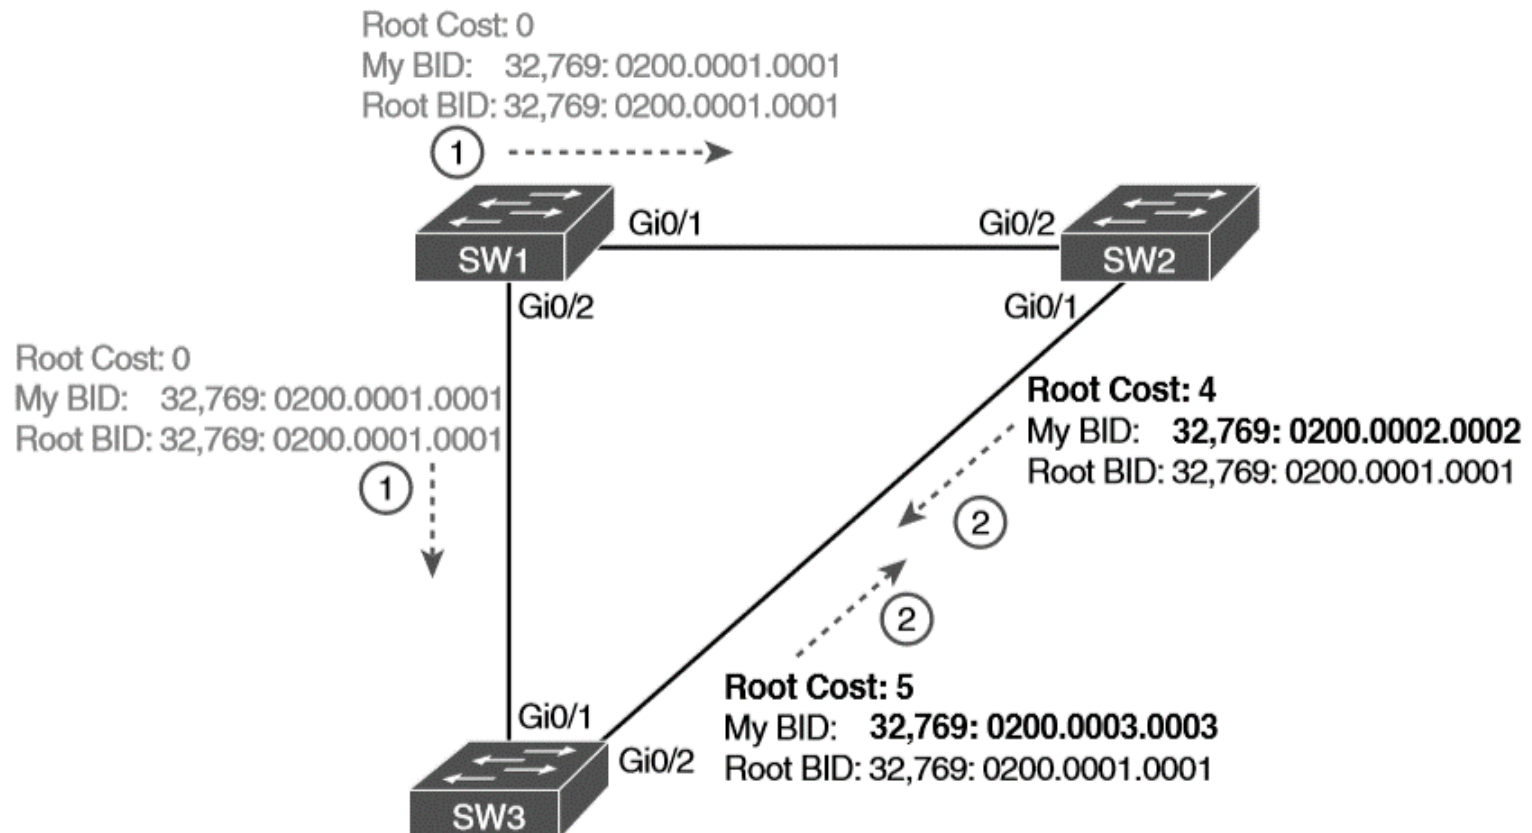


How a Human Might Calculate STP/RSTP Cost from SW3 to the Root (SW1)

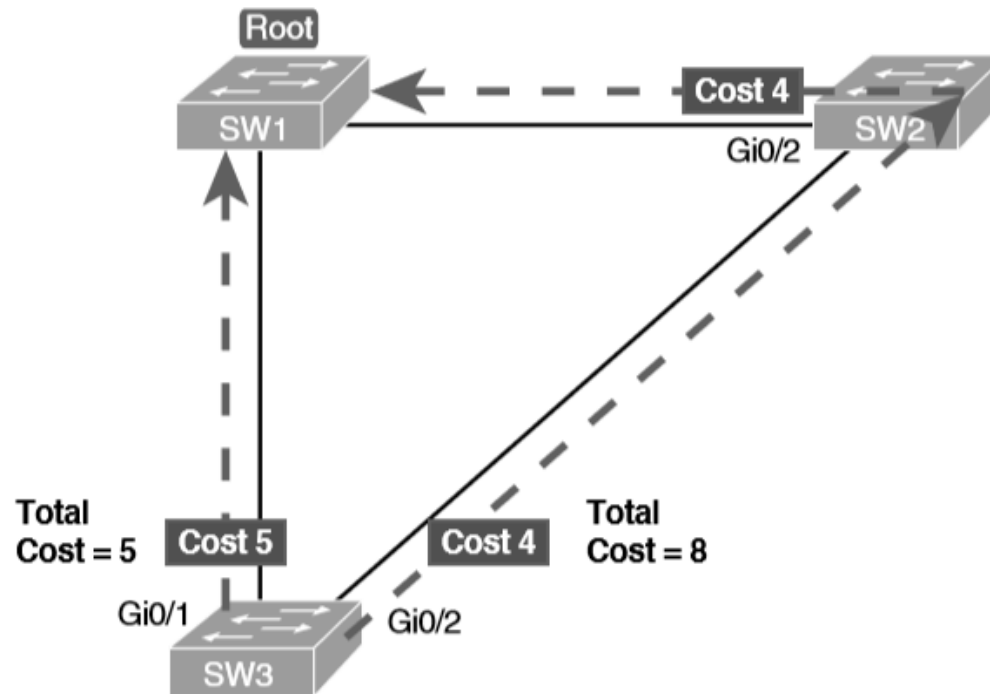

How STP/RSTP Actually Calculates the Cost from SW3 to the Root

Key Topic

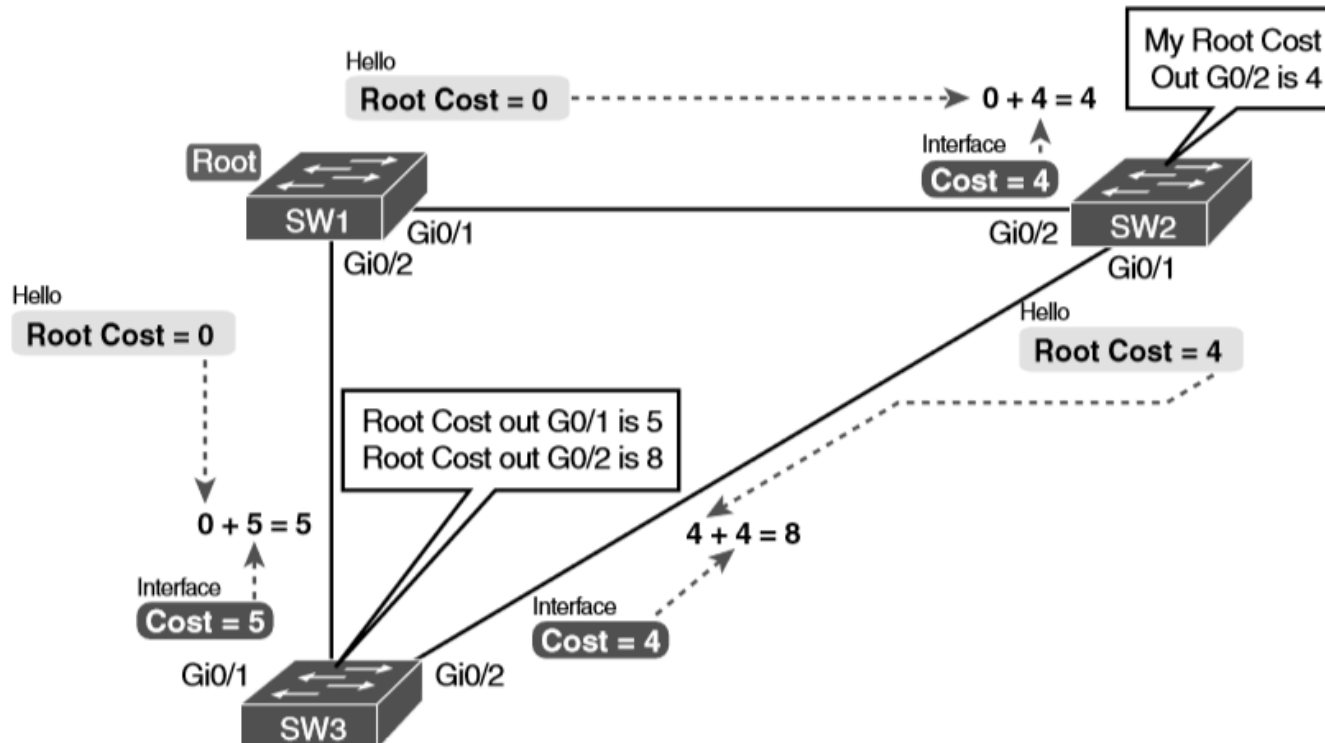

State of Each Interface

Switch Interface	State	Reason Why the Interface Is in Forwarding State
SW1, Gi0/1	Forwarding	The interface is on the root switch, so it becomes the DP on that link.
SW1, Gi0/2	Forwarding	The interface is on the root switch, so it becomes the DP on that link.
SW2, Gi0/2	Forwarding	The root port of SW2.
SW2, Gi0/1	Forwarding	The designated port on the LAN segment to SW3.
SW3, Gi0/1	Forwarding	The root port of SW3.
SW3, Gi0/2	Blocking	Not the root port and not the designated port.


Default Port Costs According to IEEE

Ethernet Speed	IEEE Cost: 1998 (and Before)	IEEE Cost: 2004 (and After)
10 Mbps	100	2,000,000
100 Mbps	19	200,000
1 Gbps	4	20,000
10 Gbps	2	2000
100 Gbps	N/A	200
1 Tbps	N/A	20


STP Timers

Timer	Default Value	Description
Hello	2 seconds	The time period between Hellos created by the root.
MaxAge	10 times Hello	How long any switch should wait, after ceasing to hear Hellos, before trying to change the STP topology.
Forward delay	15 seconds	Delay that affects the process that occurs when an interface changes from blocking state to forwarding state. A port stays in an interim listening state, and then an interim learning state, for the number of seconds defined by the forward delay timer.


Initial STP State Before SW1-SW3 Link Fails

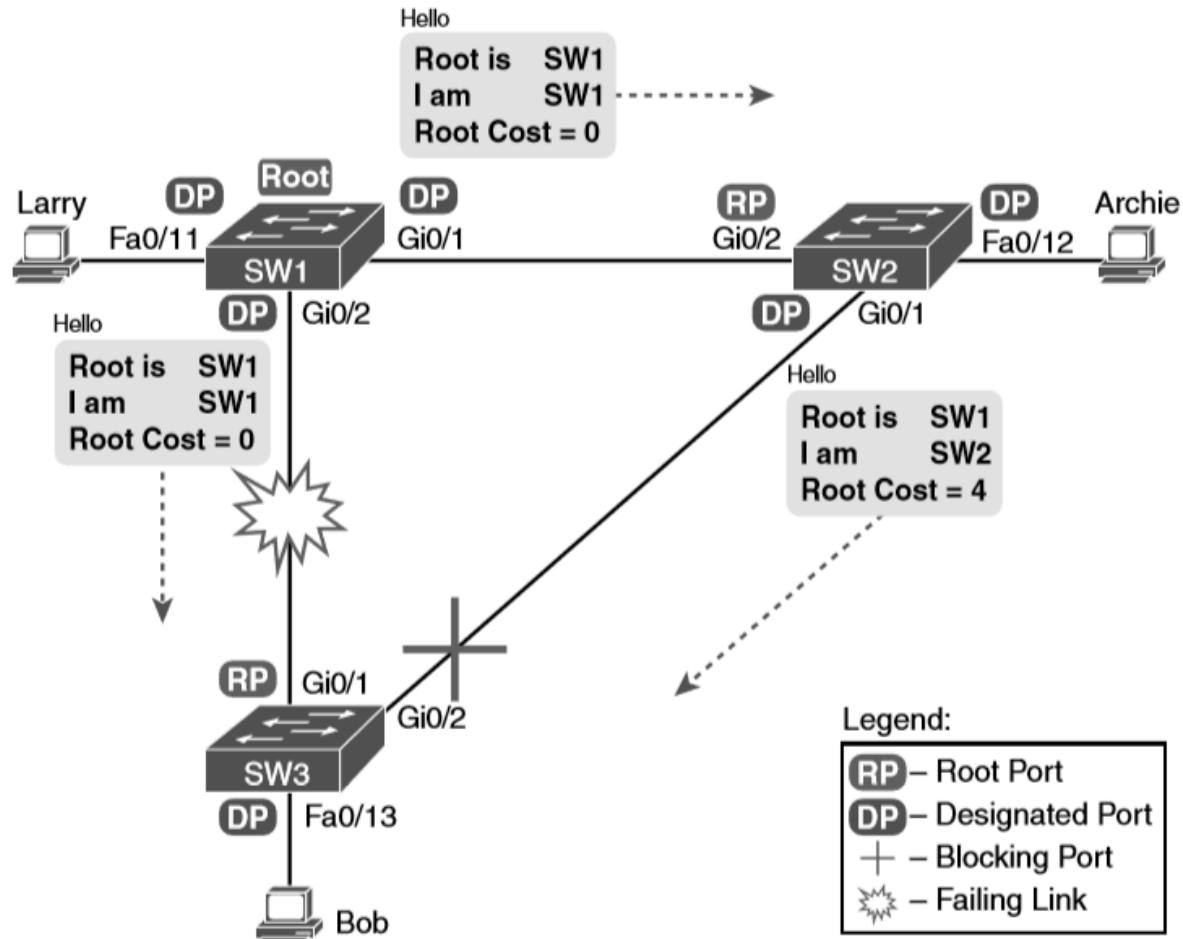


Example of SW3 Making G0/2 Become an Alternate Port

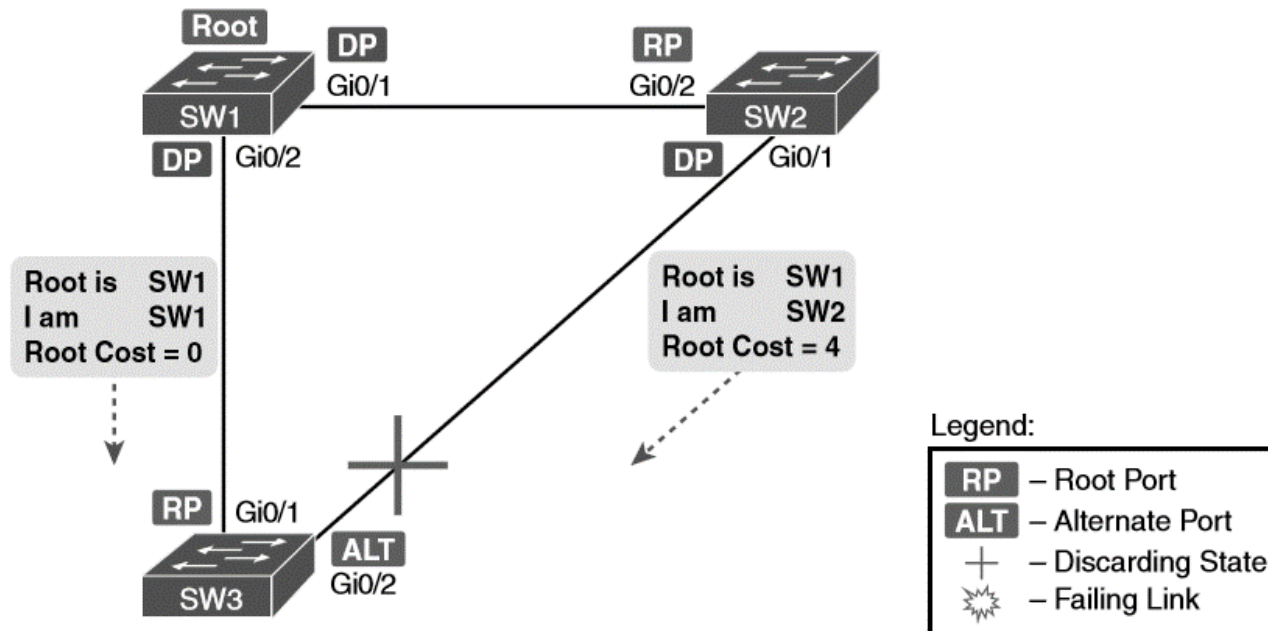


Convergence Events with SW3 G0/1 Failure

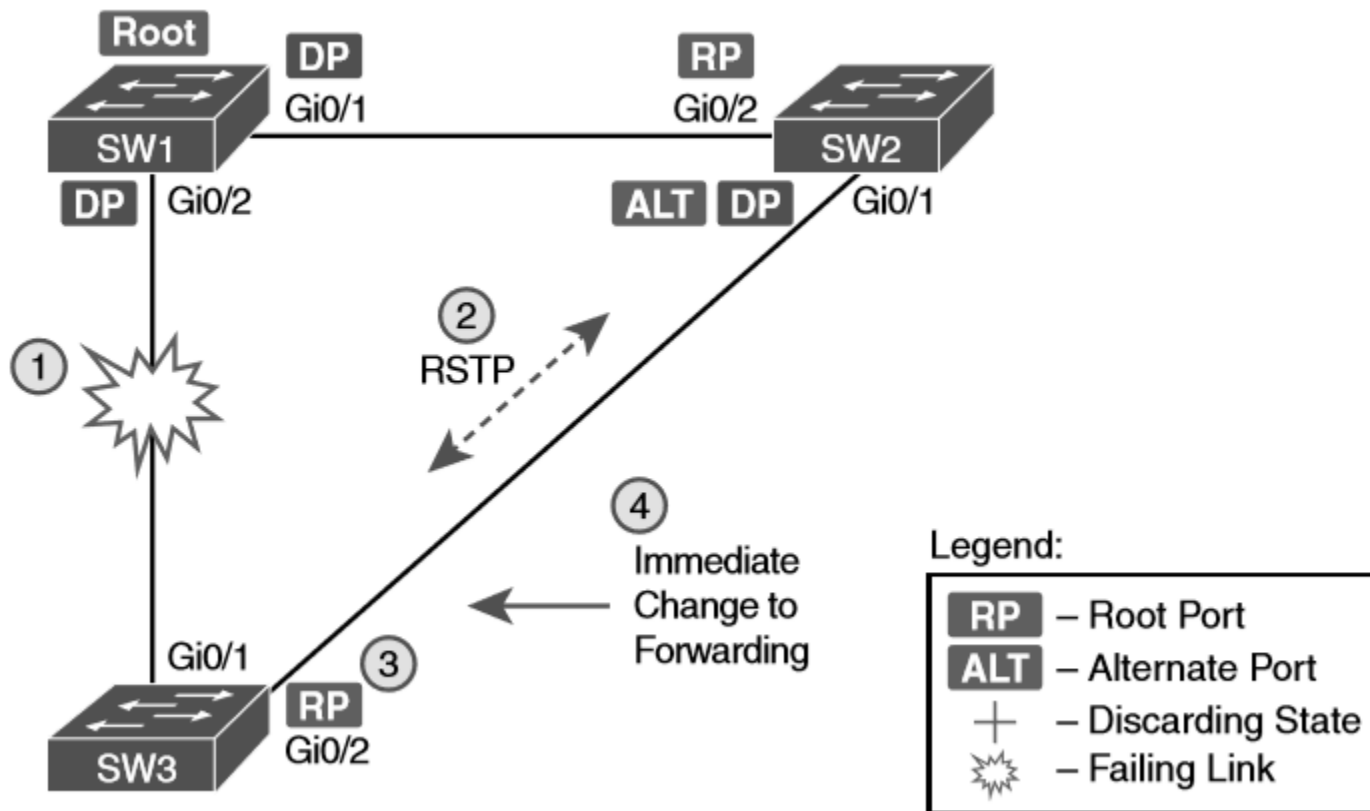

RSTP Backup Port Example

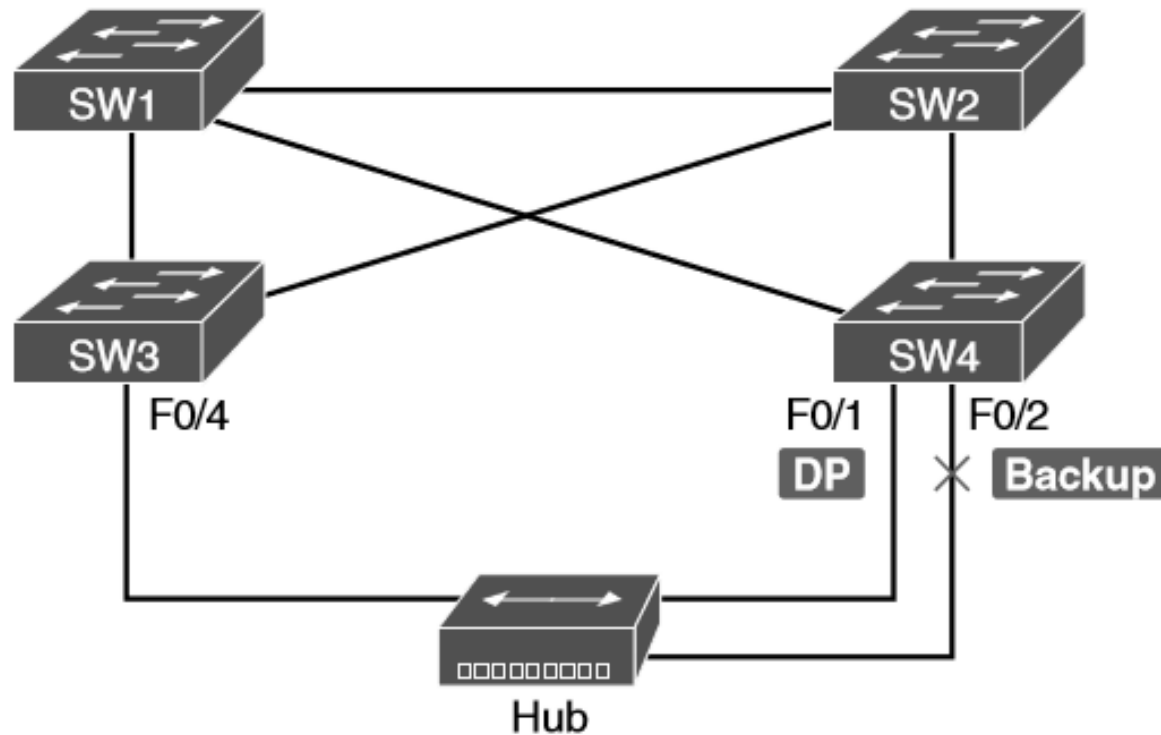

RSTP Link Types

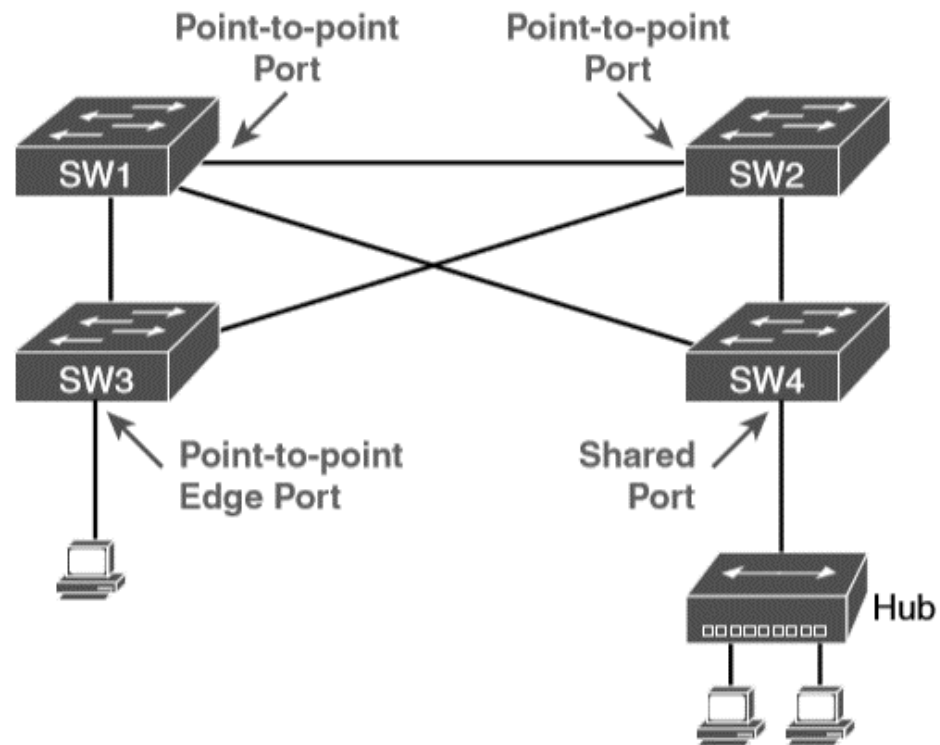

Two-Segment EtherChannels Between Switches

